


NLED950* Series IP44 Down Light



Our range of down light for retail, display and residential application has expanded greatly. Expanding the new, rationalizing the old----is what we are doing now.

NLED950* Series IP44 Down Light is one of the new down light we are promoting :

It is our responsibility to ensure that the fitting chosen is suited to the environment in which it will be installed. Bathroom, toilet, opening balcony, etc. In these areas, water sprays and small solid objects should be taken into account.

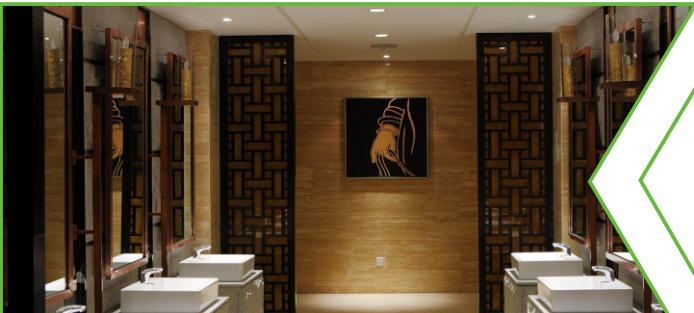

More than 90lm/w, high lumen, deliver more light for less power. It means we can purchase less fittings and pay less money to get the same experience.

In spite of good performance, we focus on appearance, so the fitting should have style, it has looks, it has its little difference in detail. NLED950* series, the housing is shaped like a ship's sails or a shell, inspired by The Sydney Opera House, novel and unique.





V-0 flame rating material, prevent turning yellowish.

Plastic coated aluminum housing,
good heat dissipation

Integrated design, compact structure,
Professional driver box for easy installation

IP44 rated for the mounting surface



Frosted PC diffuser,
deliver better uniformity



Build in non- isolated LED driver,
EMC /EMI compliant



The white mounting springs
covered with plastic, which
helps stop scratching the
mounting surface when
installation.



Three colors of terminal cover
indicate 3 different color
temperature, easy to distinguish





Specification


- 2835 SMD
- Plastic coated aluminum housing
- Frosted PC diffuser
- Build in non- isolated LED driver, EMC /EMI compliant
- IP44

Application

- Shopping mall. Meeting room. Reception area.
- Bathroom. Toilet. Balcony. Corridor

| Model | Voltage | Watt | Lumens | Color Temp | Beam angle | PF | CRI | QTY CTN | CTN Dimension |
|----------|----------|------|--------|-------------------|------------|------|------|---------|---------------|
| NLED9503 | 220-240V | 5W | 425Lm | 3000K/4000K/6000K | 90° | 0.5 | > 85 | 120 | 620x415x360mm |
| NLED9503 | 220-240V | 7W | 590Lm | 3000K/4000K/6000K | 90° | 0.5 | > 85 | 120 | 620x415x360mm |
| NLED9504 | 220-240V | 8W | 720Lm | 3000K/4000K/6000K | 90° | 0.85 | > 85 | 80 | 610x490x310mm |
| NLED9504 | 220-240V | 10W | 900Lm | 3000K/4000K/6000K | 90° | 0.85 | > 85 | 80 | 610x490x310mm |
| NLED9505 | 220-240V | 12W | 1080Lm | 3000K/4000K/6000K | 90° | 0.85 | > 85 | 60 | 620x470x390mm |
| NLED9505 | 220-240V | 14W | 1260Lm | 3000K/4000K/6000K | 90° | 0.9 | > 85 | 60 | 620x470x390mm |
| NLED9506 | 220-240V | 14W | 1260Lm | 3000K/4000K/6000K | 90° | 0.9 | > 85 | 40 | 740x370x400mm |
| NLED9506 | 220-240V | 17W | 1530Lm | 3000K/4000K/6000K | 90° | 0.9 | > 85 | 40 | 740x370x400mm |
| NLED9508 | 220-240V | 20W | 1880Lm | 3000K/4000K/6000K | 90° | 0.9 | > 85 | 20 | 525x525x510mm |
| NLED9508 | 220-240V | 25W | 2450Lm | 3000K/4000K/6000K | 90° | 0.9 | > 85 | 20 | 525x525x510mm |

Photometric Data

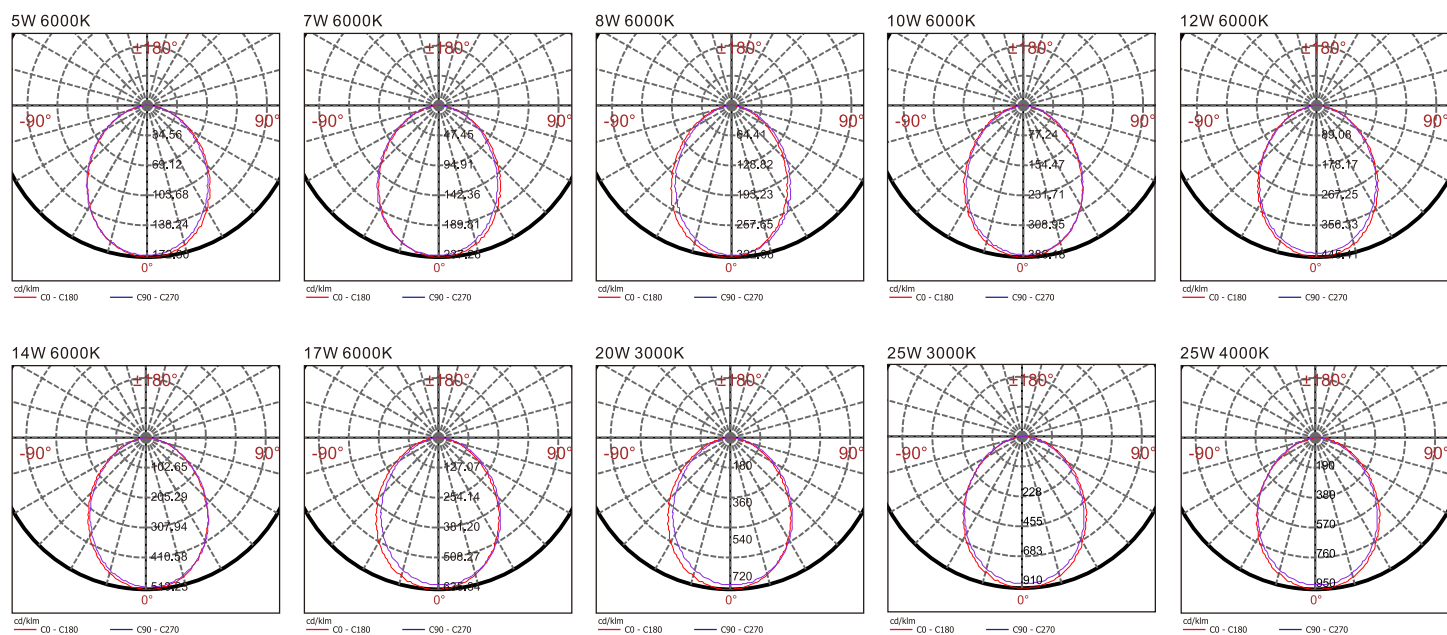

Size

