

# Ultrathin LED Downlight

Direct-emitting Economic version



**NVC**  
Lighting

OFFICIAL PARTNER



Direct emitting – LED chips attached on the surface of the base, lights direct transmit to task areas.

## Specification

- SMD LED
- Die-casting aluminum housing+PC diffuser
- Powder coated surface treatment
- Constant current LED driver is included

## Applications

- Hotel, shopping mall, exhibition hall, theater etc.

## Color



Semi White


Model	Voltage	Watt	Lumens	Color Temp	Beam angle	CRI	QTY CTN	CTN Dimension
NLED9304	110-240V	9W	630Lm	3000K/4000K/6500K	90°	> 75	24	545x370x340mm
NLED9305	110-240V	12W	840Lm	3000K/4000K/6500K	90°	> 75	12	575x410x220mm
NLED9306	110-240V	20W	1400Lm	3000K/4000K/6500K	90°	> 75	8	530x510x220mm
NLED9304R	110-240V	9W	630Lm	3000K/4000K/6500K	90°	> 75	24	545x370x340mm
NLED9305R	110-240V	12W	840Lm	3000K/4000K/6500K	90°	> 75	12	575x410x220mm
NLED9306R	110-240V	20W	1400Lm	3000K/4000K/6500K	90°	> 75	8	530x510x220mm



**NVC**  
Lighting


## Photometric Data

NLED9304 9W

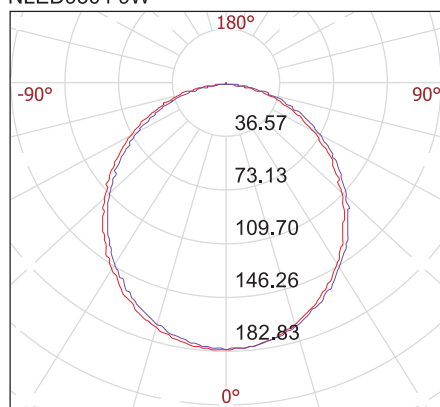


cd/klm  
— C0 - C180 — C90 - C270

NLED9305 12W

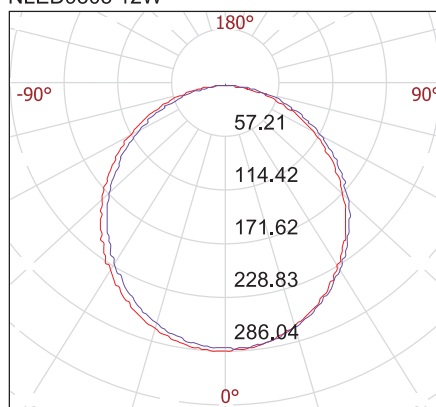


cd/klm  
— C0 - C180 — C90 - C270

NLED9306 20W

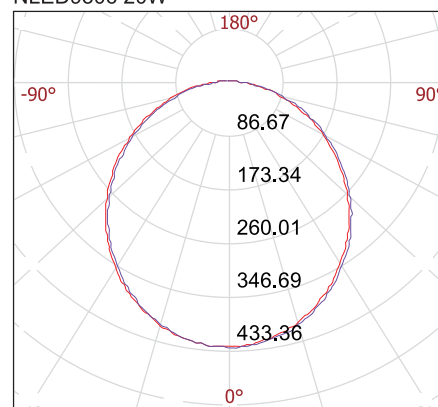

cd/klm  
— C0 - C180 — C90 - C270

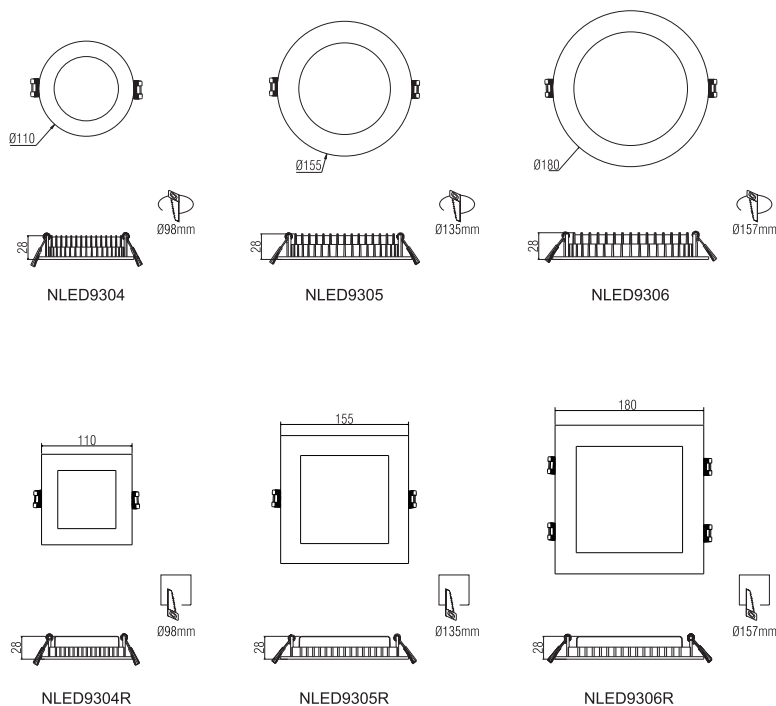

**NVC LIGHTING TECHNOLOGY CORPORATION**

Add: NVC Industrial Park, Ruhu, Huizhou, Guangdong, P.R. China 516021

Tel: +86 752-2786886 2786887 2786672

Fax: +86 752-2786689

E-mail: sale@nvc-lighting.com service@nvc-lighting.com

Http: www.nvc-lighting.com