



High Lumen
High Efficiency

NVC LED PANEL

- NLED420* Back-lit




Specification

- Steel housing
- White powder coated surface treatment
- PS diffuser
- Supply with isolated LED driver
- EMC/EMI compliant

Model	Lumens	Color temp.	CRI	PF
NLED4202 18W	1700Lm	4000K/3000K/6500K	85	0.97
NLED4203 36W	3600Lm	4000K/3000K/6500K	85	0.97
NLED4204 36W	3600Lm	4000K/3000K/6500K	85	0.97

Photometric Data

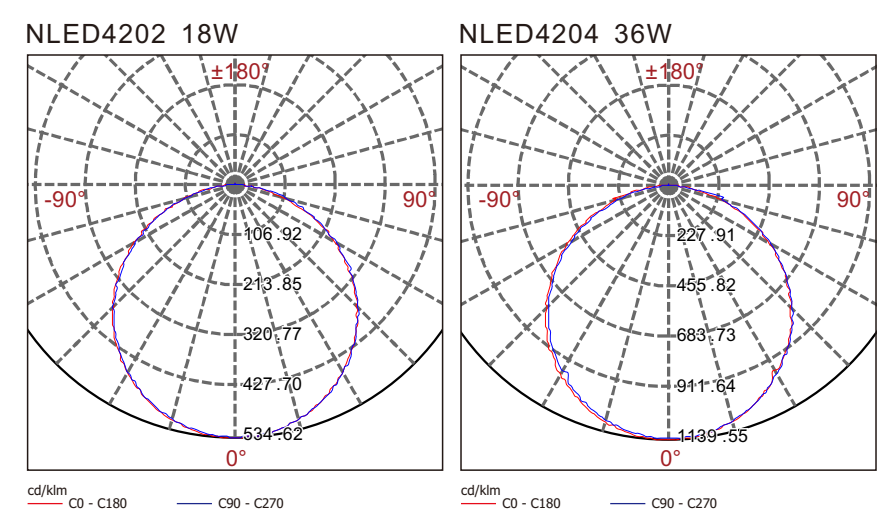



Ultra-thin design
Better uniformity

NVC LED PANEL - NLED450* Side-lit



Suspension panel rope




Surface mounted frame



Suspension panel poles

NOTE: Suspension mounted and surface mounted accessories to be order as separated parts



110°



220-240V



IP20



30000H

Specification

Aluminum frame

White powder coated surface treatment


PMMA+PS diffuser

Supply with isolated LED driver

EMC/EMI compliant

Photometric Data

NLED4504 33W

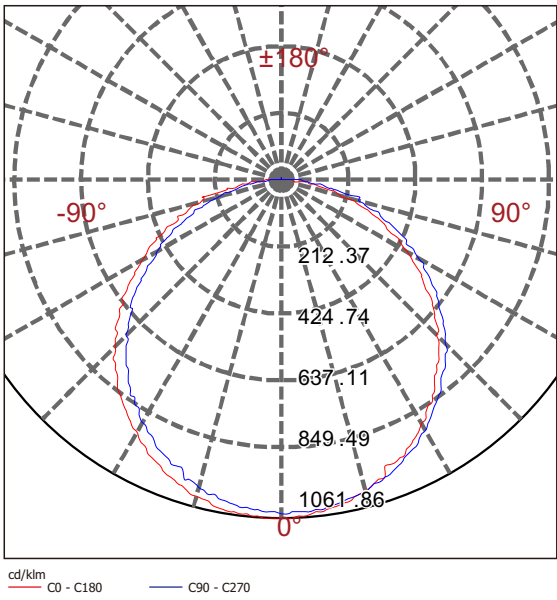

Model	Lumens	Color temp.	CRI	PF
NLED4502 18W	1790Lm	3000K/4000K/6500K	85	0.97
NLED4503 33W	3500Lm	3000K/4000K/6500K	85	0.97
NLED4504 33W	3500Lm	3000K/4000K/6500K	85	0.97
NLED4505 68W	6750Lm	3000K/4000K/6500K	85	0.97