


NVC 6016

Street Light

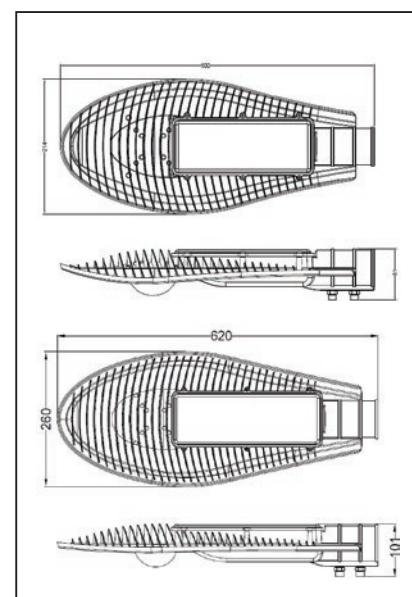

SUBSCRIPTION

- IP65 rated LED street lantern

APPLICATIONS

- Street
- Park
- CarPark


CONSTRUCTION

- Die-cast aluminium body with polyester powder coated finish to RAL9006

SPECIFICATION

- Die-casting aluminum housing
- OpticalPC lens
- Lightning protection
- Hurricane resistance
- COB LED
- LED driver is included

NVC 6016 40W



	Illuminance at a Distance	
	Center Beam LUX	Beam Width V H
2m	201.05 LUX	9.1m 5.9m
4m	50.26 LUX	18.1m 11.9m
6m	22.34 LUX	27.2m 17.8m
8m	12.57 LUX	36.2m 23.7m
10m	8.04 LUX	45.3m 29.6m
12m	5.58 LUX	54.3m 35.6m
	Vert.Spread:66.1	Horiz.Spread:128.1

Model	Watt	Lumen	Lumen/Watt	Color temp.	CRI	Weight
NVC 6016 30W	30 W	3000 lm	100 lm/W	6000 K	70+	3.2 kg
NVC 6016 40W	40 W	4000 lm	100 lm/W	6000 K	70+	3.2 kg
NVC 6016 50W	50 W	5000 lm	100 lm/W	6000 K	70+	3.2 kg
NVC 6016 60W	60 W	6000 lm	100 lm/W	6000 K	70+	4.4 kg
NVC 6016 70W	70 W	7000 lm	100 lm/W	6000 K	70+	4.4 kg
NVC 6016 80W	80 W	8000 lm	100 lm/W	6000 K	70+	4.4 kg

NVC 6016

Street Light



SUBSCRIPTION


- IP65 rated LED street lantern

APPLICATIONS

- Street
- Park
- CarPark

CONSTRUCTION


- Die-cast aluminium body with polyester powder coated finish to RAL9006

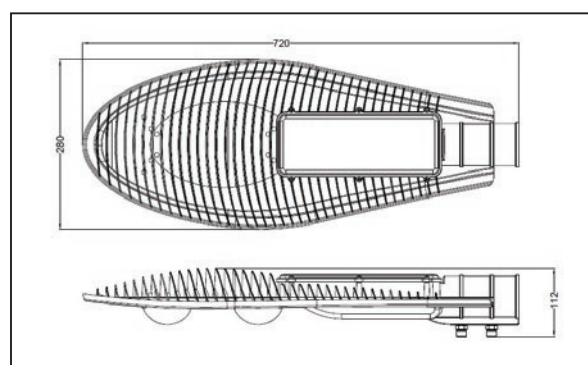

SPECIFICATION

- Die-casting aluminum housing
- Optical PC lens
- Lightning protection
- Hurricane resistance
- COB LED
- LED driver is included

NVC 6016 100W



	Center Beam LUX	Beam Width V	Beam Width H
2m	396.64 LUX	5.4m	11.5m
4m	99.16 LUX	10.8m	23.0m
6m	44.07 LUX	16.3m	34.5m
8m	24.79 LUX	21.7m	46.0m
10m	15.87 LUX	27.1m	57.5m
12m	11.02 LUX	32.5m	69.0m

Vert. Spread: 64.7 Horiz. Spread: 129.8

Model	Watt	Lumen	Lumen/Watt	Color temp.	CRI	Weight
NVC 6016 100W	100W	10000 lm	100 lm/W	6000 K	70+	6 kg
NVC 6016 120W	120W	12000 lm	100 lm/W	6000 K	70+	6.2 kg

NVC 6016

Street Light



SUBSCRIPTION

- IP65 rated LED street lantern

APPLICATIONS


- Street
- Park
- CarPark

CONSTRUCTION


- Die-cast aluminium body with polyester powder coated finish to RAL9006

SPECIFICATION

- Die-casting aluminum housing
- OpticalPC lens
- Lightning protection
- Hurricane resistance
- COB LED
- LED driver is included

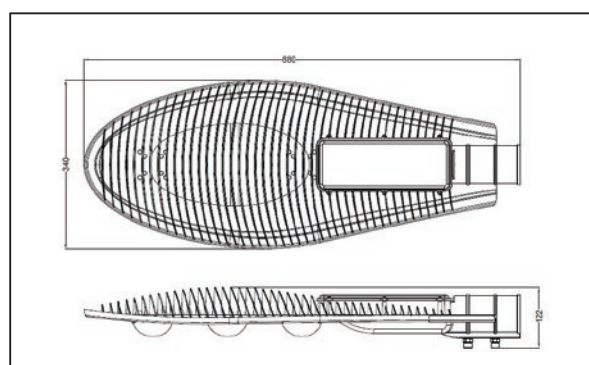

NVC 6016 150W



	Illuminance at a Distance		Beam Width	
	Center Beam LUX	V	H	
2m	570.14 LUX	5.7m	10.8m	
4m	142.53 LUX	11.3m	21.6m	
6m	63.35 LUX	17.0m	32.4m	
8m	35.63 LUX	22.6m	43.2m	
10m	22.81 LUX	28.3m	53.9m	
12m	15.84 LUX	33.9m	64.7m	
Vert.Spread:109.5		Horiz.Spread:139.4		

Model	Watt	Lumen	Lumen/Watt	Color temp.	CRI	Weight
NVC 6016 150W	150W	15000 lm	100 lm/W	6000 K	70+	8.5 kg
NVC 6016 180W	180W	18500 lm	100 lm/W	6000 K	70+	8.5 kg

NVC 6016

Street Light



SUBSCRIPTION

- IP65 rated LED street lantern

APPLICATIONS


- Street
- Park
- CarPark

CONSTRUCTION

- Die-cast aluminium body with polyester powder coated finish to RAL9006

SPECIFICATION

- Die-casting aluminum housing
- Optical PC lens
- Lightning protection
- Hurricane resistance
- COB LED
- LED driver is included

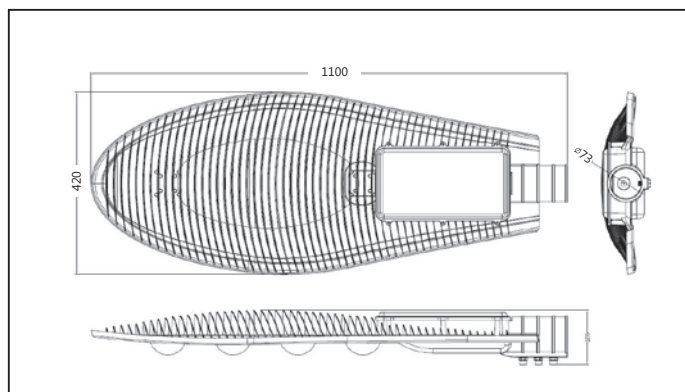

Model	Watt	Lumen	Lumen/Watt	Color temp.	CRI	Weight
NVC 6016 200W	200 W	22000 lm	110 lm/W	6000 K	70+	14.8 kg
NVC 6016 240W	240 W	27000 lm	112 lm/W	6000 K	70+	14.8 kg
NVC 6016 280W	280 W	30000 lm	107 lm/W	6000 K	70+	14.8 kg